

PRODUCT DATASHEET

ENDURA STYLE LANTERN FLARE Wall 7W

ENDURA STYLE FLARE | Stainless steel wall luminaires with indirect illumination



TECHNICAL DATA

Electrical data


Nominal wattage	7.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Power factor λ	> 0.5
Protection class	I
Operating mode	Mains voltage

Photometrical data

Luminous flux	470 lm
Luminous efficacy	67 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	≥ 80
Standard deviation of color matching	< 6 sdcn
Beam angle	230.00 °

Dimensions & Weight

Length	98.00 mm
Width	68.00 mm
Height	331.00 mm
Product weight	850.00 g

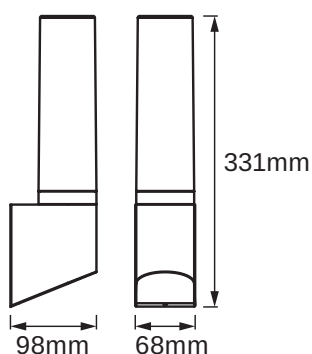

Materials & Colors

Product color	Dark gray
Housing color	Dark gray
Body material	Aluminum
Cover material	Polycarbonate (PC)
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Type of connection	Terminal, 3-Pole (L, N, PE)
Type of protection	IP44
Dimmable	No
Mounting type	Surface
Mounting location	Wall
LED module replaceable	Not replaceable

Lifespan

Lifespan L70/B50 at 25 °C	25000 h
Number of switching cycles	12500

Certificates & Standards

Standards	CE / EAC / REACH / RoHS
-----------	-------------------------

DOWNLOAD DATA

DOWNLOAD DATA	
	User instruction ENDURA STYLE LANTERN FLARE
	Tender documents Tender Text 4058075478039

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075478039	Folding box 1	117 mm x 87 mm x 354 mm	929.00 g	3.60 dm ³
4058075478046	Shipping box 4	368 mm x 248 mm x 199 mm	4121.00 g	18.16 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products.

When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.