



### Design & Dimensions (Sensor/covers)

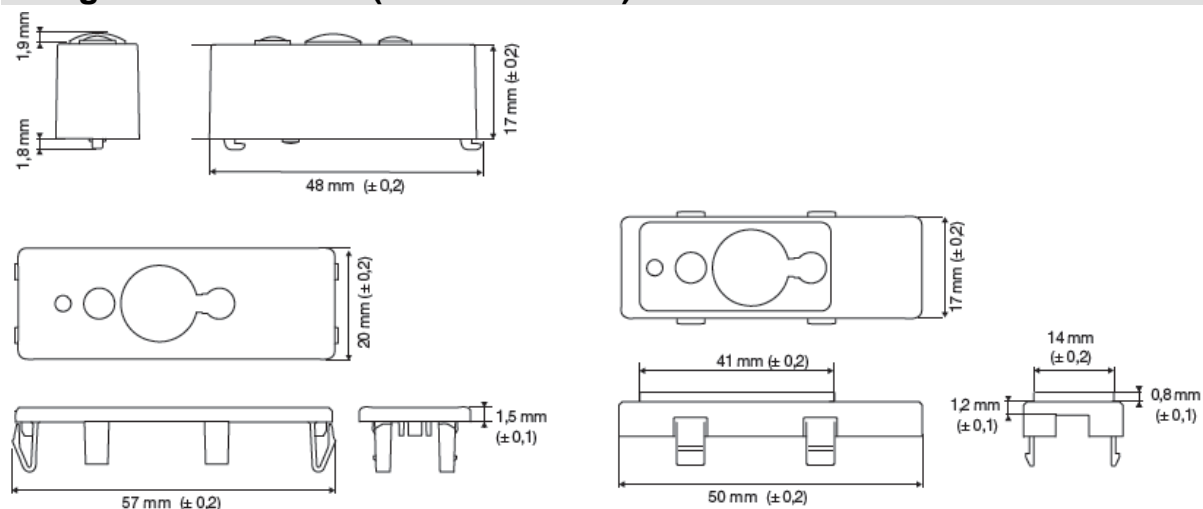

### Wiring diagram

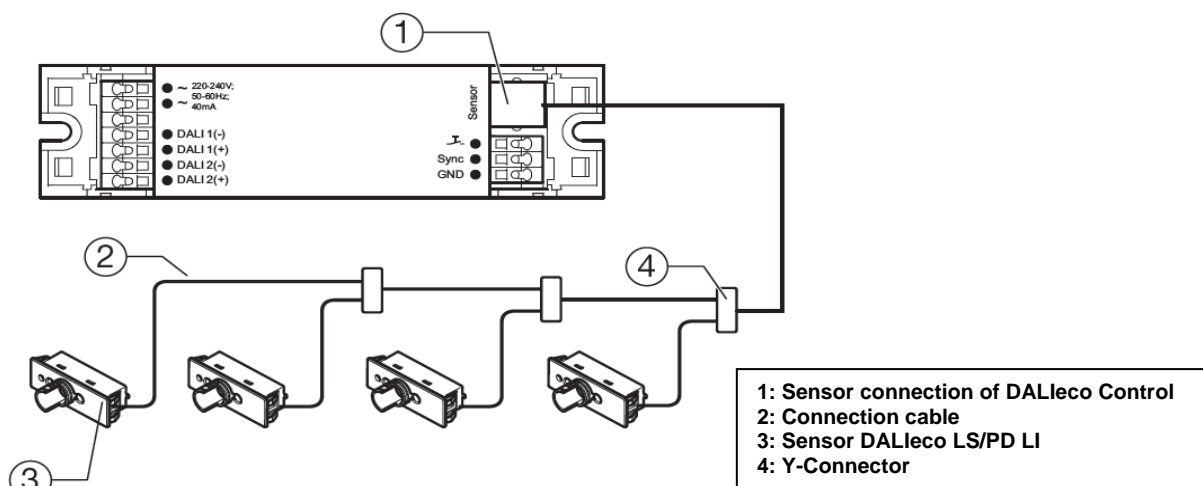

### Technical data

<b>Designation:</b>	DALIeco LS/PD LI
<b>Operating range light sensor:</b>	20 ... 800 lux (directly at sensor)
<b>Sensor connection:</b>	4p4c, max. cable length in total: 25m (in total to all sensors)
<b>Ambient temperature:</b>	-20 °C ... + 50°C (in operation)
<b>Type of protection/protection class:</b>	IP 20 / II
<b>Presence detection angle</b>	40° ... 90° (adjustable via sensor shutter)
<b>Installation height = 2,0m:</b>	Detection area: ~Ø 1,5m ... 4,0m (adjustable via shutter)
<b>Installation height = 3,0m:</b>	Detection area: ~ Ø 2,0m ... 6,0m
<b>Installation height 3,5m... 5,0m(max):</b>	Max. detection area: ~Ø 7,0m
<b>CE requirements:</b>	EMV complies with EN 61547 Low voltage complies with EN 60928