


# PRODUCT DATASHEET

## Decor Aura Wall 10W 830 Click Select

Decor Aura | Decorative lights made of polycarbonate with integrated LED and an eye-catching filament design

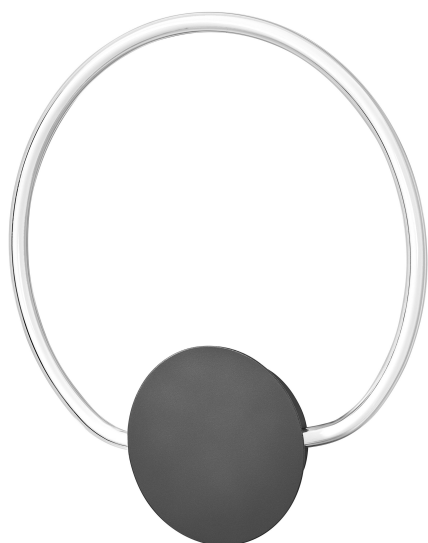

### Areas of application

- Indoor applications
- Corridors, entrance areas, stairwells, living rooms, basements

### Product benefits

- Even filament illumination
- Click dim function by wall switch for pendant and ceiling types
- Different types of luminaires with the same design language maintain a consistent style at home
- Minimalistic style fits to every room
- Combined modern table luminaire with a USB-C charging outlet
- 3-step selecting by wall switch to turn on indirect and direct lights separately (click select)
- Easy mounting

### Product features

- Housing material: polycarbonate (PC)
- High-power LED



## TECHNICAL DATA

### Electrical data


Nominal wattage	10.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	60.000 mA
Inrush current	0,06 A
Inrush current time $T_{h50}$	150 $\mu$ s
Max. number of luminaires per miniature circuit breaker B16	59
Max. number of luminaires per miniature circuit breaker C10	50
Max. number of luminaires per miniature circuit breaker C16	80
Power factor $\lambda$	$\geq 0.5$
Total harmonic distortion	< 90 %
Protection class	I
Operating mode	Mains voltage

### Photometrical data

Luminous flux	800 lm
Total luminous flux of contained light sources	1200 lm
Luminous efficacy	80 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 80
Standard deviation of color matching	6 sdc <sub>m</sub>
Flickering metric (Pst LM)	< 1
Stroboscope effect metric (SVM)	< 0,4
Photobiological safety group acc. to EN62778	RG0
Beam angle	360 °

### Dimensions & Weight

Length	367.00 mm
Width	39.00 mm
Height	419.00 mm
Product weight	800.00 g



DECOR AURA WALL 10W 830  
CLICK SEL

### Materials & Colors

Product color	Dark gray
Housing color	Dark gray
Body material	Polycarbonate (PC)
Cover material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	650 °C

### Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-20...+80 °C
Type of connection	Terminal, 3-Pole (L, N, PE)
Type of protection	IP20
Protection class IK (shock resistance)	IK03
Dimmable	No
Mounting type	Surface
Application environment	Indoor
With light source	Yes

### Lifespan

Lifespan L70/B50 at 25 °C	25000 h <sup>1)</sup>
---------------------------	-----------------------

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)




### Certificates & Standards

Standards	CE / UKCA
Luminaire with limited surface temperature, "D sign"	No
Replaceable light source (EPREL)	Not replaceable

## Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.
- Check wall-ceiling for suitability. If uncertain, seek professional advice.

## DOWNLOAD DATA

	Documents and certificates	Document name
	User instruction / safety instructions	DECOR AURA CEILING_WALL
	Declarations of conformity	CE Declaration Decor LUM
	Declarations of conformity UKCA	UKCA Declaration Decor LUM

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075842106	Folding box 1	64 mm x 393 mm x 443 mm	1100.00 g	11.14 dm <sup>3</sup>
4058075842113	Shipping box 5	404 mm x 335 mm x 473 mm	6383.00 g	64.02 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.