

PRODUCT DATASHEET

Lunetta Hall 3000K + Luminous Stickers

LUNETTA® Hall | Socket nightlight with tilt function



Areas of application

- Children's bedrooms
- Decorative domestic lighting
- For indoor use only

Product benefits

- Attractive and functional design
- Plug and Play due to EU Plug
- Automatically switches on and off according to the amount of available daylight
- Light direction individually adjustable

Product features

- Integrated day/night sensor
- Direct connection to a 220...240 V AC supply



TECHNICAL DATA

Electrical data


Nominal wattage	0.20 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	16.000 mA
Protection class	II
Operating mode	Mains voltage

Photometrical data

Luminous flux	3 lm
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 80

Dimensions & Weight

Length	65.00 mm
Width	84.00 mm
Height	73.00 mm
Product weight	55.00 g

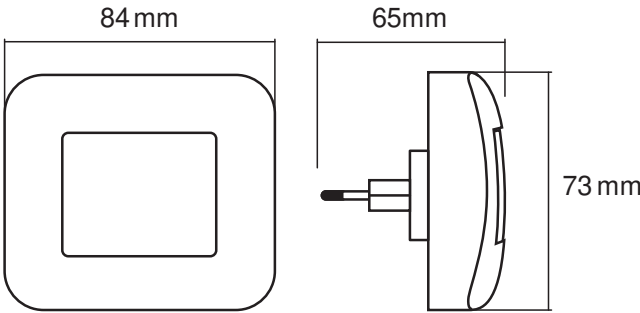

LUNETTA HALL WT STICKERS

Materials & Colors

Product color	White
Housing color	White
Body material	Polycarbonate (PC)

Light emitting surface material	Plastic
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Type of connection	Plug type C (EU)
Type of protection	IP20
Protection class IK (shock resistance)	IK02
Dimmable	No
Mounting type	Surface
Mounting location	Socket
Application environment	Indoor
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	25000 h ¹⁾
---------------------------	-----------------------

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Sensor

Type of sensor	Light
----------------	-------


Certificates & Standards

Standards	CE
Replaceable light source (EPREL)	Not replaceable

Safety advice

- This product is not a toy. It should not be left unattended in the hands of children or operated by children.
- Not designed as a replacement for conventional lighting in private household.
- Battery Warning: Keep out of reach for children. Swallowing can lead to chemical burns, perforation of soft tissue, and death. Severe burns can occur within 2 hours of ingestion. Seek medical attention immediately.
- If the battery compartment (if applicable) does not close securely, stop using the product and keep it away from children. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.
- Please avoid: Maximal ambient temperature: +35 °C. Replacement of a battery with an incorrect type that can defeat safeguard (for example, in the case of some lithium battery types). Altitude during operation: 2000 m. Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.

DOWNLOAD DATA

Documents and certificates		Document name
	Declarations of conformity	CE Declaration Lunetta Slim

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075730120	Folding box 1	71 mm x 109 mm x 153 mm	77.00 g	1.18 dm³
4058075730137	Shipping box 6	437 mm x 127 mm x 185 mm	744.00 g	10.27 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.