


PRODUCT DATASHEET

Orbis Berlin 490 mm 36W 830 BK

ORBIS BERLIN | LED ceiling luminaires with plastic ring

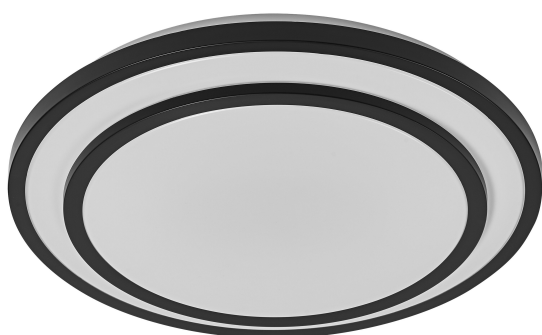

Areas of application

- Indoor applications
- Kitchens, living rooms, children's rooms or home offices

Product benefits

- Very homogenous light
- Elegant design

Product features

- Decorative domestic lighting
- Ceiling luminaire with advanced LED technology



TECHNICAL DATA

Electrical data


Nominal wattage	36.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	160.000 mA
Max. number of luminaires per miniature circuit breaker B16	50
Max. number of luminaires per miniature circuit breaker C16	66
Power factor λ	> 0.90
Total harmonic distortion	< 13 %
Protection class	I
Operating mode	Electronic control gear (ECG)

Photometrical data

Luminous flux	2400 lm
Total luminous flux of contained light sources	4700 lm
Luminous efficacy	66 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	≥80
Standard deviation of color matching	≤6 sdcn
Flickering metric (Pst LM)	< 1
Stroboscope effect metric (SVM)	< 0.4
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	120 °

Dimensions & Weight

Diameter	492.00 mm
Height	80.00 mm
Product weight	1270.00 g



ORBIS BERLIN 490MM 36W 830 SI

Materials & Colors

Product color	Black
Housing color	Black
Body material	Metal
Cover material	Plastic
Glow Wire Test according to IEC 60695-2-12	650 °C

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-20...+80 °C
Type of connection	Terminal, 3-Pole (L, N, PE)
Type of protection	IP20
Dimmable	No
Mounting type	Surface
Application environment	Indoor
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	50000 h ¹⁾
Number of switching cycles	25000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Certificates & Standards

Standards	CE / UKCA
Luminaire with limited surface temperature, "D sign"	No
Replaceable light source (EPREL)	Not replaceable





Additional product data

Number of illuminants	empty
-----------------------	-------

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.
- Check wall-ceiling for suitability. If uncertain, seek professional advice.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	ORBIS
	Legal information	Legal Insert
	Declarations of conformity	ORBIS LONDON DUBLIN BERLIN
	Declarations of conformity UKCA	ORBIS LONDON DUBLIN BERLIN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075829367	Folding box 1	85 mm x 510 mm x 510 mm	1705.00 g	22.11 dm ³
4058075829374	Shipping box 4	530 mm x 360 mm x 530 mm	8063.00 g	101.12 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.